

PDC25A

Prime Power: 17KW/21KVA

Standby Power: 19KW/24KVA

Voltage: 400V

Powered by Cummins 4B3.9-G11 Engine

Genset Performance

- 230/400V, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\% \leq -15\%$
- The transient voltage deviation $\leq +20\% \leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S(\text{Voltage} \pm 3\%)$
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
- Comply to Standard NEMA MG1-22.43
- Built-in vibration isolator with high performance on shock absorption.

Standard Configuration

- Cummins Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature (50°C Optional)
- Circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files

Optional Items

- Starting batteries
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Soundproof canopy
- Trailer
- Design and construction of environmental protection engineering for the Genset room



Diesel Engine

- **Model: Cummins 4B3.9-G11**
- **Structure:** Using forged steel camshaft and crankshaft, high-strength cylinder design, many parts are cast on the cylinder, with high rigidity, strong high-pressure resistance and longer service life;
- **Integrated design:** the cylinder block, cylinder head and other parts are "multi-purpose in one piece", reducing the number of connecting parts; 40% fewer parts than other similar engines, greatly reducing the failure rate .
- **Advanced design and sophisticated manufacturing:** adaptable to harsh working conditions and strong in high-intensity and heavy-load operation capabilities;
- **Fuel system:** The rotor high-pressure fuel pump consumes less fuel and effectively reduces noise.
- **Lubrication system:** The cylinder liner with platform texture honing design has a perfect geometric structure to effectively prevent oil leak;



Alternator

- **Optional brands: Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- **Insulation: H Class.**
- **IP Class: IP23**
- **Cooling system**
- **AC exciter, rotate rectifying**
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complies for BS5625, class 2.5
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard

- 3 phases voltage: U_a, U_b, U_c
- Frequency F_1
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature $^{\circ}\text{C}$ display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a, I_b, I_c
- Active power PA
- Power factor PF
- Temperature $^{\circ}\text{C}$ display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection

Genset Protection

- Programmable I/O signal
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components

- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital displayer



Communication Interface

(Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

Genset

Model	PDC25A
Prime Rating (kw)	17
Standby Rating (kw)	19
Rate voltage(V)	400
Rate current(A)	31
Power factor	0.8
Frequency(Hz)	50

Engine


Engine Model	4B3.9-G11
Gross Engine output-Prime (kw)	20
Gross Engine output-Standby (kw)	22
Bore * stroke (mm)	102*120
Cylinders and structure	4 In line
Displacement(Liter)	3.9
Compression Ratio	18.0:1
Intake way	Naturally Aspirated
Max intake resistance (KPa)	6.2
Air intake (m3/h)	118
Max exhaust back pressure (KPa)	10
Exhaust gas flow (m3/h)	252
Exhaust temp (°C)	380
Cooling way	Water Radiator & Fan
Fan exhaust flow (m3/min)	102
Coolant capacity (L)	17.2
Highest water temperature(°C)	104
Minimum air opening to room (m2)	0.8/0.7
Thermostat range (°C)	83-95
Max oil temperature (°C)	121
Lubrication system oil capacity (L)	10.9
Rate load fuel consumption(L/H)	5.7
Standard Governor/Class	Electronic

Alternator

Rated Voltage(V)	230/400
Output Way	3 Phases, 4 wires
Rated power factor	0.8
Exciter	Brushless, Self-exciter
Max voltage regulation	±1%
Phase	3
Protection class	IP21-23
Insulation class	H

Controller

Brand	POWERTEC
-------	----------

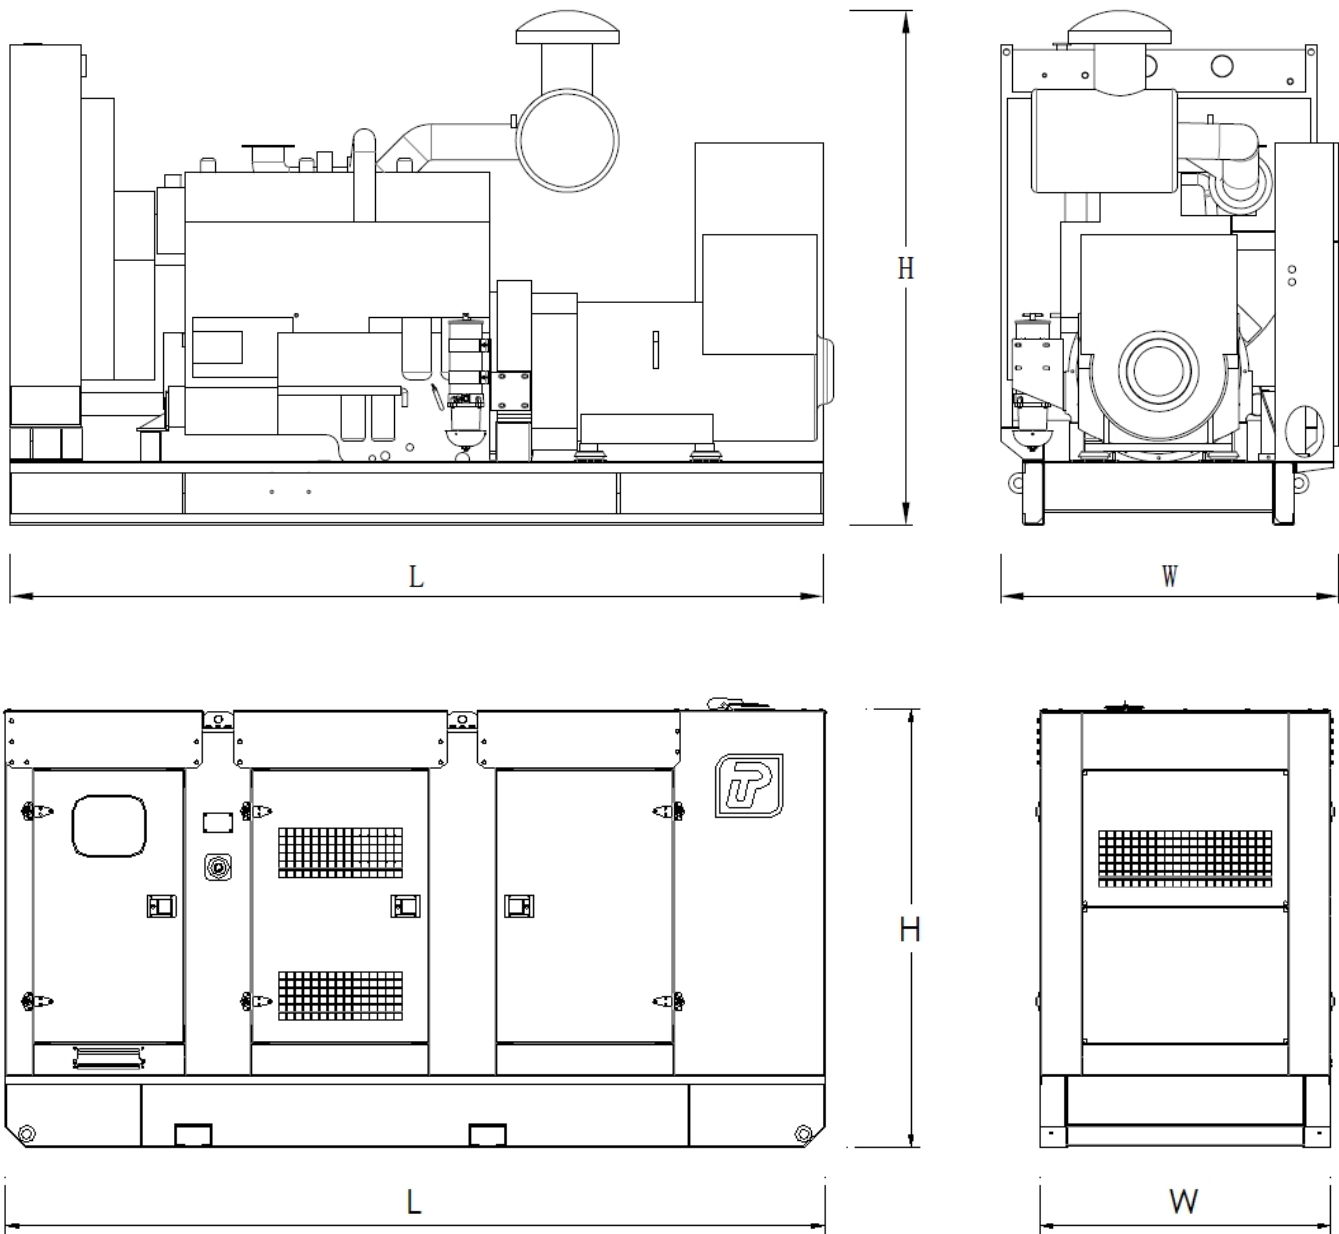

Type	Dimension (mm) (L*W*H)	Weight (kg)	Fuel Tank Capacity (L)
Open Type	2100*835*1385	744	110
Silent Type	2300*900*1550	1294	160

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China

Tel: +86 752-3911119 / 3911118

Fax: +86 752-3911110

Web: www.powertec.com.cn

Email: powertec@powertec.com.cn